

SPECIFICATION FOR APPROVAL

Description	1064nm 60W NIR Hair Removal VCSEL COB
Part No	DRS1064-M080-COB27
Date	2025-03-17

Producer	Engineering Dept.	Business department	Approval


Customer acknowledges Results		



WhatsApp

+86 13001193337 | julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

Exterior

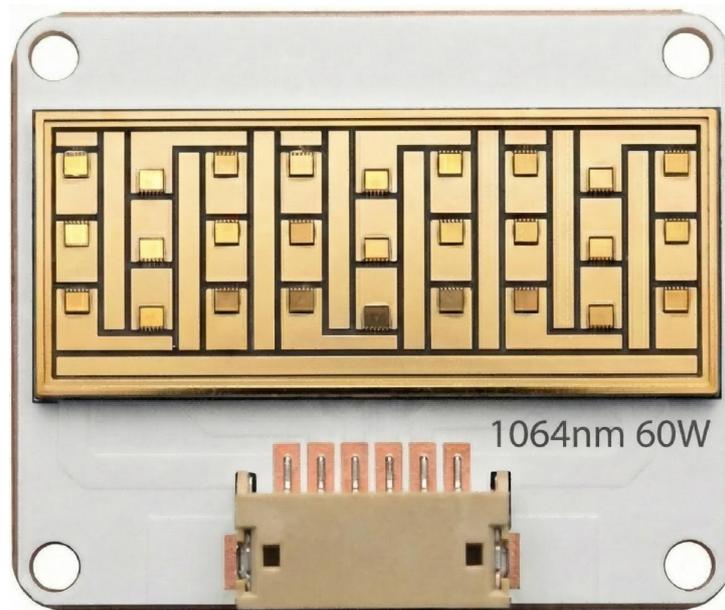

Product conformation:

- Package: COB Package
- Wavelength: 1064nm
- Electrostatic sensitive material




WhatsApp

+86 13001193337 julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

BestLaser Opto Component Device (EU) Ltd | BestLaser Opto Component Device (NA) Ltd | DERAY Optoelectronics (China)

Empowering Light. Expanding Possibilities.
BestLaser Opto Component Device Limited | Registered in Hong Kong SAR, Business Registration Certificate No. 78803147, Manufacturing & R&D Locations: Shenzhen · Nanchang · Suzhou · Xi'an, D-U-N-S* No. 7723368413 | Legal documents available upon request (Apostilled by Hong Kong High Court).
Legal Notice: The products shown in this calendar are semiconductor chips, optoelectronic devices and light source components/modules. They do not constitute any claim of medical use, health improvement, or therapeutic efficacy. Use must comply with IEC 60825-1, IEC 62471 and applicable local regulations, and photobiological safety shall be evaluated at the final end-product level. 1ONEVCSEL™ and DE-RAY OPTOELECTRONICS™ are trademarks of BestLaser Opto Component Device Limited. All other trademarks and brand names are the property of their respective owners.

Package outline dimensions

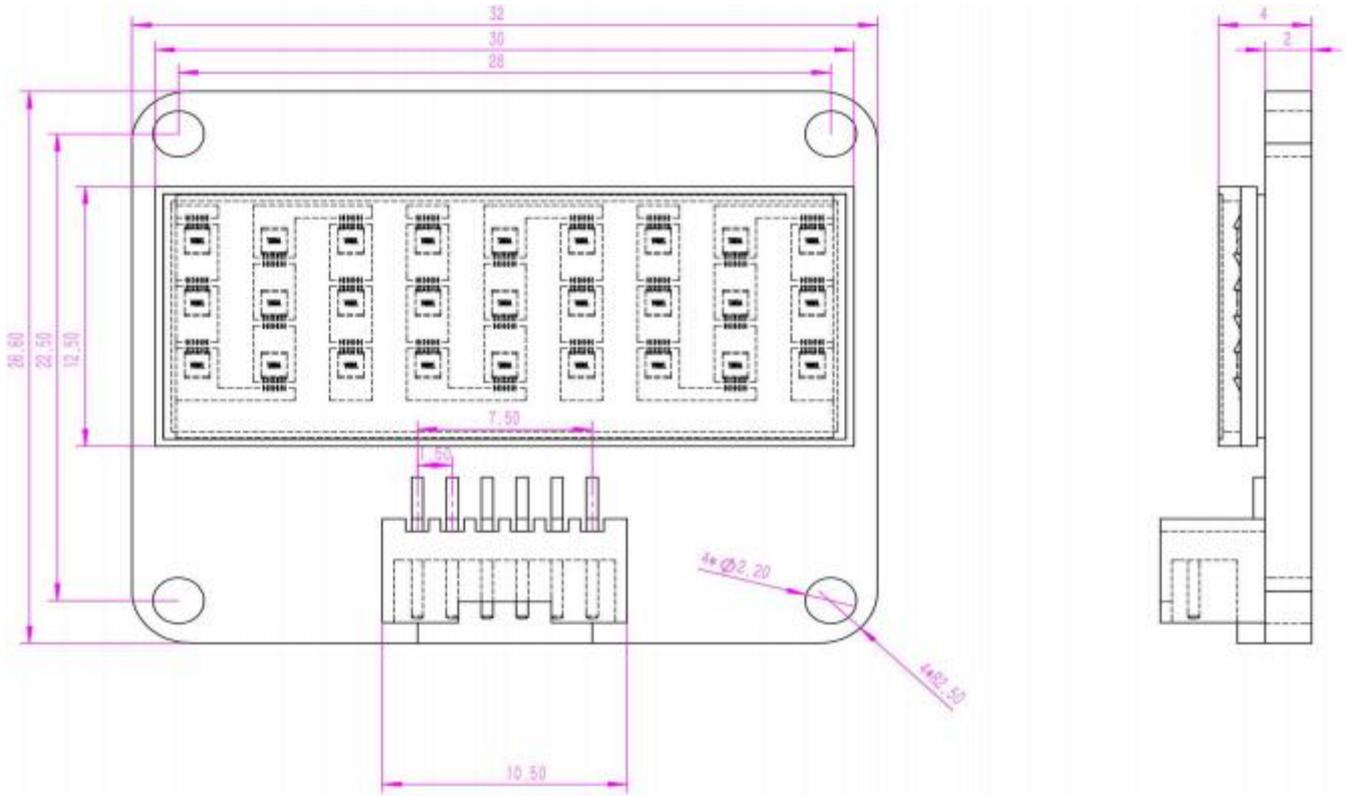

WhatsApp


+86 13001193337 | julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

Optical Characteristics

Parameter	Symbol	Unit	Min.	Typ.	Max.	Note.
Threshold Current	I _{th}	mA	-	1000	--	--
Forward Voltage	V _F	V	--	19	--	I _f =10.5A
Output Power	P _{op}	W	--	60	--	I _f =10.5A
Wavelength	λ _{op}	nm	1054	1064	1074	--
Divergence Angle(1/e ²)	deg	°	-	-	--	--

25°C, QCW mode, pulse width 5ms, duty cycle 1%


Typical Electro-Optical Characteristics Curves

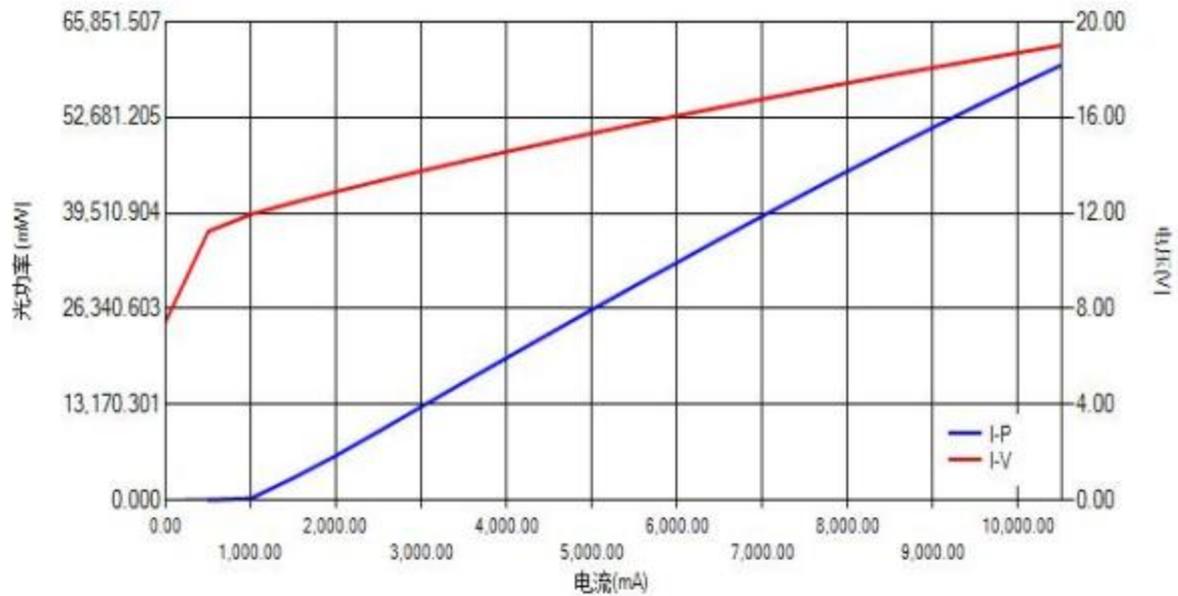


WhatsApp

+86 13001193337 | julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

Wavelength & Divergence Angle

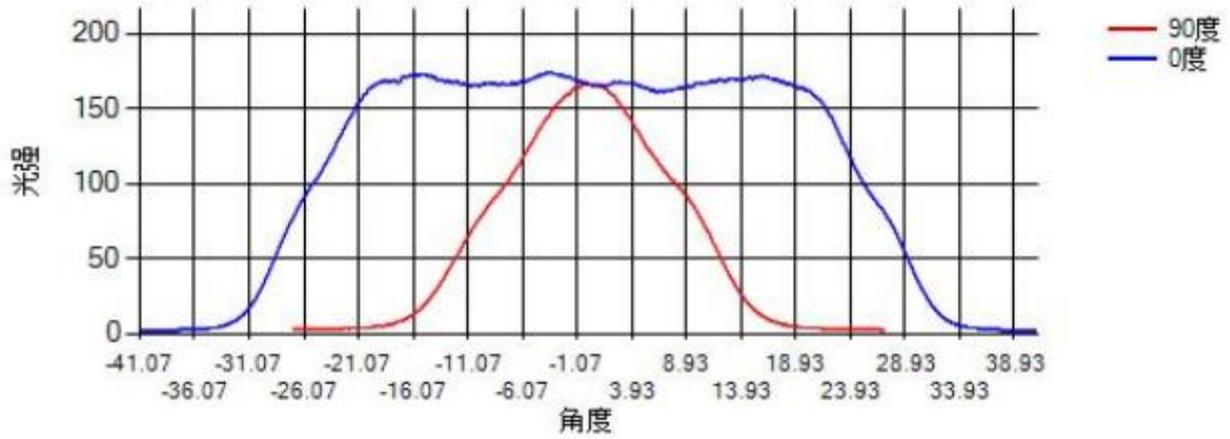

Application precautions

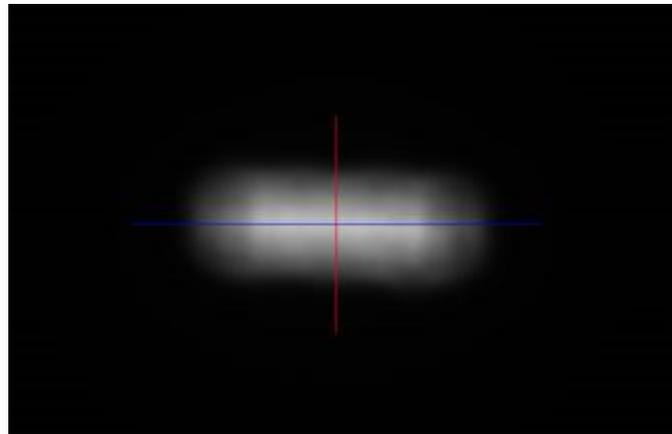

WhatsApp

+86 13001193337 | julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

BestLaser Opto Component Device (EU) Ltd | BestLaser Opto Component Device (NA) Ltd | DERAY Optoelectronics (China)

Empowering Light. Expanding Possibilities.
BestLaser Opto Component Device Limited | Registered in Hong Kong SAR, Business Registration Certificate No. 78803147, Manufacturing & R&D Locations: Shenzhen Nanchang Suzhou Xi'an, D-U-N-S* No. 7723368413 | Legal documents available upon request (Apostilled by Hong Kong High Court).
Legal Notice: The products shown in this calendar are semiconductor chips, optoelectronic devices and light source components/modules. They do not constitute any claim of medical use, health improvement, or therapeutic efficacy. Use must comply with IEC 60825-1, IEC 62471 and applicable local regulations, and photobiological safety shall be evaluated at the final end-product level. 1ONEVCSEL™ and DE-RAY OPTOELECTRONICS™ are trademarks of BestLaser Opto Component Device Limited. All other trademarks and brand names are the property of their respective owners.

Preservation and use

1. Before opening the package, it should be stored at 30°C/60%RH or less. After opening the package, it should be placed in an environment of 20-30°C/30%RH or less.
2. To avoid the impact of the environment, it is recommended to dehumidify after unpacking at 60°C/24H. All the VCSELS are needed to be vacuumed to avoid failure
3. If the desiccant faded or expired use, dry baking: 60±5°C/24 hours.
4. VCSEL Glue surface easy to dust, need to do the relevant dust prevention measures.

Heat treatment

When driven by excessive current, the T_j (node temperature) of VCSEL will exceed the period limit value, which leads to a serious shortening of VCSEL life. Thermal treatment measures should effectively reduce the thermal resistance of application products. Common practice: install VCSEL packages on metal matrix PCB boards. 1W VCSEL products require the surface heat dissipation area of the metal substrate to be at least 30cm squared (over 80cm squared is recommended for 3W products), and its thermal conductivity is higher than 2.0w/mK. VCSEL and gold substrate are combined by thermal conductive adhesive with good thermal conductivity. The thermal conductivity coefficient is required to be higher than 1.0w/mK and the thickness is less than 100um.

Clean

If you need to clean, use a clean, soft cloth dipped in alcohol to gently remove foreign matter. Do not use a cleaner such as acetone to avoid possible corrosion damage.



WhatsApp

+86 13001193337 | julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

BestLaser Opto Component Device (EU) Ltd | BestLaser Opto Component Device (NA) Ltd | DERAY Optoelectronics (China)

Empowering Light. Expanding Possibilities.
BestLaser Opto Component Device Limited | Registered in Hong Kong SAR, Business Registration Certificate No. 78803147, Manufacturing & R&D Locations: Shenzhen · Nanchang · Suzhou · Xi'an, D-U-N-S* No. 7723368413 | Legal documents available upon request (Apostilled by Hong Kong High Court).
Legal Notice: The products shown in this calendar are semiconductor chips, optoelectronic devices and light source components/modules. They do not constitute any claim of medical use, health improvement, or therapeutic efficacy. Use must comply with IEC 60825-1, IEC 62471 and applicable local regulations, and photobiological safety shall be evaluated at the final end-product level. 1ONEVCSEL™ and DE-RAY OPTOELECTRONICS™ are trademarks of BestLaser Opto Component Device Limited. All other trademarks and brand names are the property of their respective owners.

Electrical precautions

1. VCSEL Reverse drive is not allowed
2. Current limiting measures are necessary, otherwise slight voltage changes will lead to large current changes, which may lead to VCSEL failure.
3. Under the premise that the luminous quantity meets the requirements, it is recommended to use the drive current lower than the rated current, which is conducive to improving the reliability of the product.

anti-static precautions

VCSEL is electrostatic sensitive devices, in the process of preservation, use to take anti-static measures. Static electricity and surge can lead to changes in product characteristics, such as forward voltage reduction, which can be serious and even damage the product. So for the whole process (production, testing, packaging, etc.) and VCSEL direct contact staff should do a good job to prevent and eliminate electrostatic measures. All related equipment and machinery should be properly grounded. The grounding ac resistance is less than 1.0 ohm, the table mat with surface resistance of 10⁶-10⁹ ohm is needed on the work table. Ion fans must also be installed in electrostatic environments and equipment. During the operation, the operator should use anti-static bracelet, anti-static mat, anti-static overalls, working shoes, gloves, anti-static capacity.

An electric soldering iron

It is recommended to use anti-static electric soldering iron, the temperature at the tip does not exceed 350°C, less than 3 seconds for each soldering. The power of the soldering iron should be less than 60W. Weld two electrode pins more than 2 seconds after each welding. Do not force the lens during welding. Problems with VCSELs usually begin when they are soldered. So you must work carefully as required.



WhatsApp

+86 13001193337 | julian.xu@deraysemi.com
BestLaser Opto Component Device Limited

BestLaser Opto Component Device (EU) Ltd | BestLaser Opto Component Device (NA) Ltd | DERAY Optoelectronics (China)

Empowering Light. Expanding Possibilities.
BestLaser Opto Component Device Limited | Registered in Hong Kong SAR, Business Registration Certificate No. 78803147, Manufacturing & R&D Locations: Shenzhen Nanchang Suzhou Xi'an, D-U-N-S* No. 7723368413 | Legal documents available upon request (Apostilled by Hong Kong High Court).

Legal Notice: The products shown in this calendar are semiconductor chips, optoelectronic devices and light source components/modules. They do not constitute any claim of medical use, health improvement, or therapeutic efficacy. Use must comply with IEC 60825-1, IEC 62471 and applicable local regulations, and photobiological safety shall be evaluated at the final end-product level. 1ONEVCSEL™ and DE-RAY OPTOELECTRONICS™ are trademarks of BestLaser Opto Component Device Limited. All other trademarks and brand names are the property of their respective owners.